

DIAL THERMOMETERS

BI-METAL - 1" DIAL SIZE

BI-METAL POCKET THERMOMETER with HIGH MAGNIFYING LENS

This pocket thermometer is furnished in a 1" dial size, stainless steel case with a raised, clear acrylic, magnifying lens, which enhances the readability of the small dial from greater distances. The instrument can be easily recalibrated using a nut located on the rear of the case; however, all instruments are factory tested prior to shipment. A pointed stainless steel stem, 5" in length and .142" in diameter, allows the thermometer to easily penetrate into meats and like substances without damaging the product or the thermometer. The instrument is supplied in a convenient plastic carrying case with a pocket clip and is designed for general testing.




RANGE	STEM	CATALOG NUMBER
*25° to 125°F	5"	B1098M43C-5.0
-40° to 160°F	5"	B1098M90C-5.0
*0° to 220°F	5"	B1098M82C-5.0
50° to 500°F	5"	B1098M95C-5.0

*NSF listed range

1" BI-METAL REFRIGERATOR CASE THERMOMETER with THREADED STEM & NUT

This thermometer is furnished in a 1" dial size, stainless steel case with a domed, clear acrylic lens, and a 1/4-28 threaded fitting on the stem with matching nut for permanent installation on a refrigerated display case or similar equipment. A hex nut, located at the rear of the case, is provided for recalibrating if necessary; however, all instruments are factory tested prior to shipment. A stainless steel pointed stem is furnished in nominal 2 1/2" or 5" lengths, and is .142" in diameter. Other stem lengths can be custom-made for high volume requirements. Please consult factory for details.

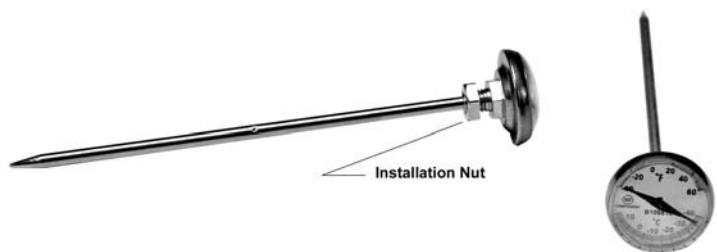

RANGE	STEM	CATALOG NUMBER
-40° to 60°F/C	2 1/2"	B1098D18D-2.5
-40° to 60°F/C	5"	B1098D18D-5.0

MILJOCO
CORPORATION

14335 E. NINE MILE RD., WARREN, MI 48089 www.miljoco.com PHONE 586 777-4280 FAX 586 777-7891

DIAL THERMOMETERS

BI-METAL - 1" DIAL SIZE

BI-METAL POCKET THERMOMETER for FLANGE MOUNTING

This pocket thermometer is furnished standard in a 1" dial size, stainless steel case with a clear plastic lens. A hex nut, located at the rear of the case is provided for recalibrating if necessary; however, all instruments are factory tested prior to shipment. A pointed stainless steel stem, 5" in length and .145" in diameter, allows the thermometer to easily penetrate into meats and like substances without damaging the product or thermometer. The instrument is supplied in a convenient plastic carrying case with a pocket clip and is designed for general testing.



RANGE	STEM	CATALOG NUMBER
*25° to 125°F	5"	B1098D43A-5.0
-40° to 160°F	5"	B1098D90A-5.0
*0° to 220°F	5"	B1098D82A-5.0
50° to 500°F	5"	B1098D95A-5.0

*NSF listed range

MOUNTING FLANGES

Stainless steel mounting flanges are designed to secure and display 1" bi-metal thermometers listed above. The instruments are mounted to a surface with a flange held by two screws. Upon mounting, the stem projects through the surface, exposing the sensor to the environment being measured.

FLANGE SIZE	CATALOG NUMBER
1 3/8" x 2 1/4"	65-8



MILJOCO
CORPORATION

14335 E. NINE MILE RD., WARREN, MI 48089 www.miljoco.com PHONE 586 777-4280 FAX 586 777-7891

DIGITAL THERMOMETERS

LCD DIGITAL POCKET THERMOMETER

The digital pocket thermometer is ideal for the user who requires precise readings to the one-tenth degree. The indicator face is 1¼" in diameter and is housed in a plastic case. The instrument updates its reading in one second intervals and is furnished with an on-off switch to extend battery life. The stainless steel stem is 5" in length and .145" in diameter. The thermometer is provided with a protective pocket sheath and clip for carrying purposes.



RANGE	STEM	CATALOG NUMBER
-58 to 302°F	5"	CD1098122

HAND-HELD DIGITAL TESTERS

Hand-held digital thermometers are convenient and mobile, and are ideal for testing the temperature of a wide variety of media from food products to air ducts, while being completely portable.

The LCD display has large easy-to-read figures and a range of -58 to 302°F & -50 to 150°C. A switch is provided to alternate the display between Fahrenheit and Celsius, and a button is furnished to hold temperature readings for logging purposes.

The CD300 has a convenient, gray & white plastic pocket size case and provides many features found only on more expensive testers.

The CD400 is a larger hand held device, encased in a 5¼" rigid ABS housing. It features a larger display, readings in full degrees or tenths of a degree, and a removable/replaceable probe system to accommodate longer probe cables.

CD400



CD300



STYLE	SIZE (WEIGHT)	PROBE	RANGE	CATALOG NO.
Hand-Held	3.0" x 1.6" x 0.5" (2 oz.)	Fixed, 20" Lead	-58° to 302°F/C	CD300
Deluxe Hand-Held	5.3" x 2.9" x 1.3" (9 oz.)	Removable, 72" Lead	-58° to 302°F/C	CD400

MILJOCO
CORPORATION

14335 E. NINE MILE RD., WARREN, MI 48089 www.miljoco.com PHONE 586 777-4280 FAX 586 777-7891